

SIPLUS HMI KTP700 Basic DP based on 6AV2123-2GA03-0AX0 with conformal coating, -20...+50 °C, key/touch operation, 7" TFT display, 65536 colors, PROFIBUS interface, configurable as of WinCC Basic V13/ STEP 7 Basic V13, contains open source software, which is provided free of charge see enclosed CD-ROM

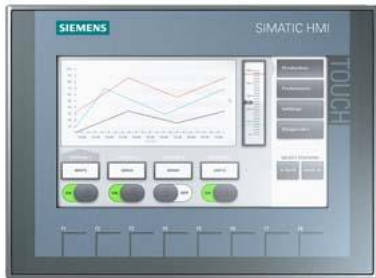


Figure similar

General information	
Product type designation	KTP700 Basic color DP
based on	<a href="#">6AV2123-2GA03-0AX0</a>
Display	
Design of display	TFT widescreen display, LED backlighting
Screen diagonal	7 in
Display width	154.1 mm
Display height	85.9 mm
Number of colors	65 536
Resolution (pixels)	
• Horizontal image resolution	800 pixel
• Vertical image resolution	480 pixel
Backlighting	
• MTBF backlighting (at 25 °C)	20 000 h
• Backlight dimmable	Yes
Control elements	
Keyboard	
• Function keys	
— Number of function keys	8
— Number of function keys with LEDs	0
• Keys with LED	No
• System keys	No
• Numeric keyboard	Yes; Onscreen keyboard
• alphanumeric keyboard	Yes; Onscreen keyboard
Touch operation	
• Design as touch screen	Yes; Analog-resistive
Installation type/mounting	
Mounting position	vertical
Mounting in portrait format possible	Yes
Mounting in landscape format possible	Yes
maximum permissible angle of inclination without external ventilation	35°
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
permissible range, lower limit (DC)	19.2 V
permissible range, upper limit (DC)	28.8 V
Input current	

Current consumption (rated value)	230 mA
Starting current inrush I <sup>2</sup> t	0.2 A <sup>2</sup> ·s
<b>Power</b>	
Active power input, typ.	5.5 W
<b>Processor</b>	
Processor type	ARM
<b>Storage</b>	
Flash	Yes
RAM	Yes
Memory available for user data	10 Mbyte
<b>Type of output</b>	
Acoustics	
• Buzzer	Yes
• Speaker	No
<b>Time of day</b>	
Clock	
• Hardware clock (real-time)	Yes
• Software clock	Yes
• retentive	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	0
Number of RS 485 interfaces	1
Number of RS 422 interfaces	1; together with RS 485
Number of RS 232 interfaces	0; with optional adapter
Number of USB interfaces	1; Up to 16 GB
Number of 20 mA interfaces (TTY)	0
Number of parallel interfaces	0
Number of other interfaces	0
Number of SD card slots	0
With software interfaces	No
<b>Industrial Ethernet</b>	
• Industrial Ethernet status LED	0
<b>Protocols</b>	
PROFINET	No
Supports protocol for PROFINET IO	No
IRT	No
PROFIBUS	Yes
EtherNet/IP	No
MPI	Yes
<b>Protocols (Ethernet)</b>	
• TCP/IP	No
• DHCP	No
• SNMP	No
• DCP	No
• LLDP	No
<b>WEB characteristics</b>	
• HTTP	No
• HTML	No
<b>Redundancy mode</b>	
Media redundancy	
— MRP	No
<b>Further protocols</b>	
• CAN	No
• MODBUS	Yes; Modicon (MODBUS RTU)
<b>Interrupts/diagnostics/status information</b>	
Diagnoses	
• Diagnostic information readable	No

EMC	
Emission of radio interference acc. to EN 55 011	
• Limit class A, for use in industrial areas	Yes
• Limit class B, for use in residential areas	No
Degree and class of protection	
IP (at the front)	IP65
IP (rear)	IP20
NEMA (front)	
• Enclosure Type 4 at the front	Yes
• Enclosure Type 4x at the front	Yes
Standards, approvals, certificates	
Ecological footprint	
• environmental product declaration	Yes
Global warming potential	
— global warming potential, (total) [CO2 eq]	85 kg
— global warming potential, (during production) [CO2 eq]	26.2 kg
— global warming potential, (during operation) [CO2 eq]	59.2 kg
— global warming potential, (after end of life cycle) [CO2 eq]	-0.682 kg
Ambient conditions	
Ambient temperature during operation	
Operation (vertical installation)	
— For vertical installation, min.	-20 °C; = Tmin
— For vertical installation, max.	50 °C
Operation (max. tilt angle)	
— At maximum tilt angle, min.	-20 °C; = Tmin
— At maximum tilt angle, max.	40 °C
Operation (vertical installation, portrait format)	
— For vertical installation, min.	-20 °C; = Tmin
— For vertical installation, max.	40 °C
Operation (max. tilt angle, portrait format)	
— At maximum tilt angle, min.	-20 °C; = Tmin
— At maximum tilt angle, max.	35 °C
Ambient temperature during storage/transportation	
• min.	-20 °C
• max.	60 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position
Resistance	
Coolants and lubricants	
— Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
— to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
— to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
— to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
— to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
— to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *

— to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
<b>Usage in industrial process technology</b>	
— Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
— Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
— Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>	
<ul style="list-style-type: none"> <li>• Coatings for printed circuit board assemblies acc. to EN 61086</li> <li>• Protection against fouling acc. to EN 60664-3</li> <li>• Military testing according to MIL-I-46058C, Amendment 7</li> <li>• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A</li> </ul>	<p>Yes; Class 2 for high reliability</p> <p>Yes; Type 1 protection</p> <p>Yes; Discoloration of coating possible during service life</p> <p>Yes; Conformal coating, Class A</p>
<b>Operating systems</b>	
proprietary	Yes
<b>pre-installed operating system</b>	
<ul style="list-style-type: none"> <li>• Windows CE</li> </ul>	No
<b>Configuration</b>	
Message indicator	Yes
Alarm system (incl. buffer and acknowledgment)	Yes
Process value display (output)	Yes
Process value default (input) possible	Yes
Recipe management	Yes
<b>Configuration software</b>	
<ul style="list-style-type: none"> <li>• STEP 7 Basic (TIA Portal)</li> <li>• STEP 7 Professional (TIA Portal)</li> <li>• WinCC flexible Compact</li> <li>• WinCC flexible Standard</li> <li>• WinCC flexible Advanced</li> <li>• WinCC Basic (TIA Portal)</li> <li>• WinCC Comfort (TIA Portal)</li> <li>• WinCC Advanced (TIA Portal)</li> <li>• WinCC Professional (TIA Portal)</li> </ul>	<p>Yes; via integrated WinCC Basic (TIA Portal)</p> <p>Yes; via integrated WinCC Basic (TIA Portal)</p> <p>No</p> <p>No</p> <p>No</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>
<b>Languages</b>	
<b>Online languages</b>	
<ul style="list-style-type: none"> <li>• Number of online/runtime languages</li> </ul>	10
<b>Project languages</b>	
<ul style="list-style-type: none"> <li>• Languages per project</li> </ul>	32
<b>Functionality under WinCC (TIA Portal)</b>	
Libraries	Yes
<b>Applications/options</b>	
<ul style="list-style-type: none"> <li>• Web browser</li> <li>• SIMATIC WinCC Sm@rtServer</li> </ul>	<p>No</p> <p>No</p>
Number of Visual Basic Scripts	No
<b>Task planner</b>	
<ul style="list-style-type: none"> <li>• time-controlled</li> <li>• task-controlled</li> </ul>	<p>No</p> <p>Yes</p>
<b>Help system</b>	
<ul style="list-style-type: none"> <li>• Number of characters per info text</li> </ul>	500
<b>Message system</b>	
<ul style="list-style-type: none"> <li>• Number of alarm classes</li> <li>• Bit messages <ul style="list-style-type: none"> <li>— Number of bit messages</li> </ul> </li> <li>• Analog messages</li> </ul>	<p>32</p> <p>1 000</p>

— Number of analog messages	25
• S7 alarm number procedure	No
• System messages HMI	Yes
• System event, more (SIMATIC S7, SINUMERIK, SIMOTION, ...)	Yes; System message buffer of the SIMATIC S7-1200 and S7-1500
• Number of characters per message	80
• Number of process values per message	8
• Acknowledgment groups	Yes
• Message indicator	Yes
• Message buffer	
— Number of entries	256
— Circulating buffer	Yes
— retentive	Yes
— maintenance-free	Yes
<b>Recipe management</b>	
• Number of recipes	50
• Data records per recipe	100
• Entries per data record	100
• Size of internal recipe memory	256 kbyte
• Recipe memory expandable	No
<b>Variables</b>	
• Number of variables per device	800
• Number of variables per screen	100
• Limit values	Yes
• Multiplexing	Yes
• Structures	No
• Arrays	Yes
<b>Images</b>	
• Number of configurable images	250
• Permanent window/default	Yes
• Global image	Yes
• Pop-up images	No
• Slide-in images	No
• Image selection by PLC	Yes
• Image number in the PLC	Yes
<b>Image objects</b>	
• Number of objects per image	100
• Text fields	Yes
• I/O fields	Yes
• Graphic I/O fields (graphics list)	Yes
• Symbolic I/O fields (text list)	Yes
• Date/time fields	Yes
• Switches	Yes
• Buttons	Yes
• Graphic display	Yes
• Icons	Yes
• Geometric objects	Yes
<b>Complex image objects</b>	
• Number of complex objects per screen	10
• Alarm view	Yes
• Trend view	Yes
• User view	Yes
• Status/control	No
• Sm@rtClient view	No
• Recipe view	Yes
• f(x) trend view	No
• System diagnostics view	Yes; System message buffer of the SIMATIC S7-1200 and S7-1500
• Media Player	No
• HTML browser	No

• PDF display	No
• IP camera display	No
• Bar graphs	Yes
• Sliders	No
• Pointer instruments	No
• Analog/digital clock	No
<b>Lists</b>	
• Number of text lists per project	300
• Number of entries per text list	100
• Number of graphics lists per project	100
• Number of entries per graphics list	100
<b>Archiving</b>	
• Number of archives per device	2; One message and one process value archive
• Number of entries per archive	10 000
• Message archive	Yes
• Process value archive	Yes
• Archiving methods	
— Sequential archive	Yes
— Short-term archive	Yes
• Memory location	
— Memory card	No
— USB memory	Yes
— Ethernet	No
• Data storage format	
— CSV	No
— TXT	Yes
— RDB	No
<b>Security</b>	
• Number of user groups	50
• Number of user rights	32
• Number of users	50
• Password export/import	Yes
• SIMATIC Logon	No
<b>Character sets</b>	
• Keyboard fonts	
— US English	Yes
<b>Transfer (upload/download)</b>	
• MPI/PROFIBUS DP	Yes
• USB	No
• Ethernet	No
• using external storage medium	Yes
<b>Process coupling</b>	
• S7-1200	Yes
• S7-1500	Yes
• S7-200	Yes
• S7-300/400	Yes
• LOGO!	Yes
• WinAC	Yes
• SINUMERIK	Yes; No access to NCK data
• SIMOTION	Yes
• Allen Bradley (EtherNet/IP)	No
• Allen Bradley (DF1)	Yes
• Mitsubishi (MC TCP/IP)	No
• Mitsubishi (FX)	Yes
• OMRON (FINS TCP)	No
• OMRON (Host Link)	Yes
• Modicon (Modbus TCP/IP)	No
• Modicon (Modbus RTU)	Yes
<b>Service tools/configuration aids</b>	

- Backup/Restore manually Yes
- Backup/Restore automatically No
- Simulation Yes
- Device switchover Yes

#### Peripherals/Options

Printer	No
SIMATIC HMI MM memory card: Multi Media Card	No
SIMATIC HMI SD memory card: Secure Digital memory card	No
SIMATIC HMI CF memory card Compact Flash Card	No
USB memory	Yes
SIMATIC IPC USB Flashdrive (USB stick)	Yes
SIMATIC HMI USB stick	Yes

#### Mechanics/material

Enclosure material (front)	
• Plastic	Yes
• Aluminum	No
• Stainless steel	No

#### Dimensions

Width of the housing front	214 mm
Height of housing front	158 mm
Mounting cutout, width	198 mm
Mounting cutout, height	142 mm
mounting depth	39 mm

#### Weights

Weight (without packaging)	800 g
Weight (with packaging)	1 kg

#### Classifications

	Version	Classification
eClass	16	27-33-02-01
eClass	14	27-33-02-01
eClass	12	27-33-02-01
eClass	9.1	27-33-02-01
eClass	9	27-33-02-01
eClass	8	27-24-23-02
eClass	7.1	27-24-23-02
eClass	6	27-24-23-02
ETIM	10	EC001412
ETIM	9	EC001412
ETIM	8	EC001412
ETIM	7	EC001412
IDEA	4	6607
UNSPSC	15	43-21-15-06

#### Approvals / Certificates

##### General Product Approval



[Manufacturer Declaration](#)

[China RoHS](#)



General Product Approval	EMV	Environment
--------------------------	-----	-------------

[China RoHS](#)



---

last modified:

7/28/2025 